11-7045-200-34P

TM 11-7045-200-34P

TECHNICAL MANUAL

NEWARK PUBLIC LIBRARY
DEC 20
U.S. GOVT. PUBS.

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST FOR

ERASER, MAGNETIC MX-10387/T (NSN 7045-01-126-3239)

NEWARK PUBLIC LIBRARY
DEC
U.S. GOVERNMENT
DEPOSITORY

HEADQUARTERS, DEPARTMENT OF THE ARMY
12 SEPTEMBER 1985

D 101.11:

TECHNICAL MANUAL

NO. 11-7045-200-34P

HEADQUARTERS
DEPARTMENT OF THE ARMY
WASHINGTON, DC, *12 September 1985*

DIRECT SUPPORT AND GENERAL SUPPORT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST FOR ERASER, MAGNETIC MX-10387/T (NSN 7045-01-126-3239)

Current as of 21 June 1985

REPORTING ERRORS AND RECOMMENDING IMPROVEMENTS

You can help improve this manual. If you find any mistakes or if you know of a way to improve the procedures, please let us know. Mail your letter, DA Form 2028 (Recommended Changes to Publications and Blank Forms), or DA Form 2028-2 located in the back of this manual direct to: Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-ME-MP, Fort Monmouth, NJ 07703-5007.

In either case, a reply will be furnished direct to you.

READEX FICHE

Table of Contents

		Page	Illus Figure
SECTION I.	Introduction	1	
II.	Repair Parts List	1-1	
GROUP 00	Eraser, Magnetic MX-10387/T	1-1	1
01	Reel Carriage Assembly	2-1	2
02	Carriage Control Assembly	3-1	3
SECTION III.	Special Tools List (Not applicable)		
IV.	National Stock Number and Part Number Index	I-1	

SECTION I
INTRODUCTION

1. Scope

This manual lists and authorizes spares and repair parts; special tools; special test, measurement, and diagnostic equipment (TMDE); and other special support equipment required for performance of direct support and general support maintenance of the MX-10387/T. It authorizes the requisitioning, issue, and disposition of spares, repair parts and special tools as indicated by the source, maintenance and recoverability (SMR) codes.

2. General

This Repair Parts and Special Tools List is divided into the following sections:

a. *Section II. Repair Parts List.* A list of spares and repair parts authorized by this RPSTL for use in the performance of maintenance. The list also includes parts which must be removed for replacement of the authorized parts. Parts lists are composed of functional groups in ascending numeric sequence, with the parts in each group listed in ascending item number sequence.

b. *Section III. Special Tools List.* Not applicable.

c. *Section IV. National Stock Number and Part Number Index.* A list, in National item identification number (NIIN) sequence, on all National stock numbered items appearing in the listing, followed by a list in alphameric sequence of all part numbers appearing in the listings. National stock numbers and part numbers are cross-referenced to each illustration figure and item number appearance.

3. Explanation of Columns (Section II and III)

a. *Item No. Column (1)).* Indicates the number used to identify items called out in the illustration.

b. *SMR Code (Column (2)).* The source, maintenance, and recoverability (SMR) code is a five-position code containing supply/requisitioning information, maintenance category authorization criteria, and disposition instruction, as shown in the following breakout:

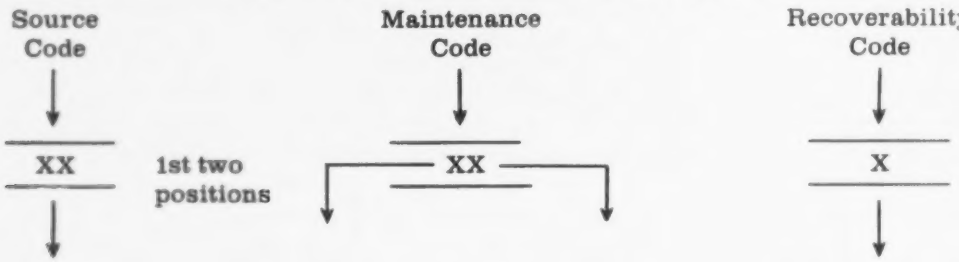

How you get an item.	3d position	4th position	Who determines disposition action on an unserviceable item.
	Who can install. replace or use . the item.	Who can do complete repair (see note) on the item.	

NOTE

Complete repair: Maintenance capacity, capability, and authority to perform all corrective maintenance tasks of the "Repair" function in a use/user environment in order to restore serviceability to a failed item.

(1) *Source code.* The source code tells you how to get an item needed for maintenance, repair, or overhaul of an end item/equipment. Explanations of source codes follows:

Code	*Explanation*
PA PB PC PD PE PF PG	Stocked items; use the applicable NSN to request/requisition items with these source codes. They are authorized to the category indicated by the code entered in the third position of the SMR code. **NOTE** Items coded PC are subject to deterioration.

Code	*Explanation*
KD KF KB	Items with these codes are not to be requested/requisitioned individually. They are part of a kit which is authorized to the maintenance category indicated in the third position of the SMR code. The complete kit must be requisitioned and applied.

MO—Made at org/AVUM category MF—Made at DS/AVUM category MH—Made at GS category ML—Made at Specialized Repair Activity (SRA) MD—Made at Depot	Items with these codes are not to be requested/requisitioned individually. They must be made from bulk material which is identified by the part number in the description and usable on code (UOC) column and listed in the Bulk Material group of the repair parts list. If the item is authorized to you by the third position code of the SMR code, but the source code indicates it is made at a higher category, order the item from the higher category of maintenance.

Code	*Explanation*
AO—Assembled by org/AVUM category AF—Assembled by DS/AVIM category AH—Assembled by GS category AL—Assembled by SRA AD—Assembled by Depot	Items with these codes are not to be requested/requisitioned individually. The parts that make up the assembled item must be requisitioned or fabricated and assembled at the category of maintenance indicated by the source code. If the disposition code of the SMR code authorizes you to replace the item, but the source code indicates the item is assembled at a higher category, order the item from the higher category of maintenance.

Code	*Explanation*
XA	Do not requisition an "XA" coded item. Order its next higher assembly.
XB	If an "XB' item is not available from salvage, order it using the FSCM and part number given.
XC	Installation drawing, diagram, instruction sheet, field service drawing, that is identified by manufacturers part number.
XD	Item is not stocked. Order an "XD" coded item through normal supply channels using the FSCM and part number given, if no NSN is available.

NOTE

Cannibalization or controlled exchange, when authorized, may be used as a source of supply for items with the above source codes, except for those source coded "XA" or those aircraft support items restricted by requirements of AR 750-1.

(2) *Maintenance code.* Maintenance codes tell you the category of maintenance authorized to USE and REPAIR support items. The maintenance codes are entered in the third and fourth positions of the SMR code as follows:

(a) The maintenance code entered in the third position tells you the lowest maintenance category authorized to remove, replace, and use an item. The maintenance code entered in the third position will indicate authorization to one of the following categories of maintenance.

Code	*Application/Explanation*
C	Crew or operator maintenance done within organizational or aviation maintenance.
O	Organizational or aviation unit category can remove, replace, and use the item.
F	Direct support or aviation intermediate category can remove, replace, and use the item.
H	General support category can remove, replace, and use the item.
L	Specialized repair activity can remove, replace, and use the item.
D	Depot category can remove, replace, and use the item.

(*b*) The maintenance code entered in the fourth position tells whether or not the item is to be repaired and identifies the lowest maintenance category with the capability to do complete repair (i.e., perform all authorized repair functions). This position will contain one of the following maintenance codes.

NOTE

Some limited repair may be done on the item at a lower category of maintenance, if authorized by the Maintenance Allocation Chart (MAC) and SMR codes.

Code	*Application/Explanation*
O	Organizational or aviation unit is the lowest category that can do complete repair of the item.
F	Direct support or aviation intermediate is the lowest category that can do complete repair of the item.
H	General support is the lowest category that can do complete repair of the item.
L	Specialized repair activity (designate the specialized repair activity) is the lowest category that can do complete repair of the item.
D	Depot is the lowest category that can do complete repair of the item.
Z	Nonreparable. No repair is authorized.
B	No repair is authorized. (No parts or special tools are authorized for the maintenance of a "B" coded item). However, the item may be reconditioned by adjusting, lubricating, etc., at the user category.

(3) *Recoverability code.* Recoverability codes are assigned to items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the SMR Code as follows:

Recoverability Codes	*Application/Explanation*
Z	Nonreparable Item. When unserviceable, condemn and dispose of the item at the category of maintenance shown in the third position of SMR Code.
O	Reparable item. When uneconomically reparable, condemn and dispose of the item at organizational or aviation unit category.
F	Reparable item. When uneconomically reparable, condemn and dispose of the item at direct support or aviation intermediate category.
H	Reparable item. When uneconomically reparable, condemn and dispose of the item at general support category.
D	Reparable item. When beyond lower category repair capability, return to depot. Condemnation and disposal of item not authorized below depot category.
L	Reparable item. Condemnation and disposal not authorized below specialized repair activity (SRA)
A	Item requires special handling or condemnation procedures because of specific reasons (e. g., precious metal content, high dollar value, critical material, or hazardous material). Refer to appropriate manuals/directives for specific instructions.

c. FSCM (Column (3)). The Federal Supply Code for Manufacturer (FSCM) is a 5-digit numeric code which is used to identify the manufacturer, distributor, or Government agency, etc., that supplies the item.

d. Part Number (Column (4)). Indicates the primary number used by the manufacturer (individual, company, firm, corporation, or Government activity), which controls the design and characteristics of the item by means of its engineering drawings, specifications, standards, and inspection requirements to identify an item or range of items.

NOTE

When you use a NSN to requisition an item, the item you receive may have a different part number from the part ordered.

e. Description and Usable on Code (UOC) (Column (5)). This column includes the following information.

(1) The Federal item name and, when required, a minimum description to identify the item.

(2) The statement "END OF FIGURE" appears just below the last item description in Column (5) for a given figure in both section II and section III.

f. Qty (Column (6)). Indicates the quantity of the item used in the breakout shown on the illustration figure, which is prepared for a functional group, subfunctional group, or an assembly. A "V" appearing in this column in lieu of a quantity indicates that the quantity is variable and the quantity may vary from application to application.

4. Explanation of Columns (Section IV)

a. *National Stock Number (NSN) Index.*

(1) Stock number column. This column lists the NSN by National item identification number (NIIN) sequence. The NIIN consists of the last nine digits of the NSN. When using this column to locate an item, ignore the first four digits of the NSN. When requisitioning items use the complete NSN (13 digits).

(2) *Fig. column.* This column lists the number of the figure where the item is identified/located. The illustrations are in numerical sequence in sections II and III.

(3) *Item column.* The item number identifies the item associated with the figure listed in the adjacent Fig. column. This item is also identified by the NSN listed on the same line.

b. Part Number Index. Part numbers in this index are listed by part number in ascending alphameric sequence.

(1) *FSCM column.* This column lists the Federal supply code for manufacturer (FSCM).

(2) *Part number column.* This column indicates the part number assigned to the item.

(3) *Stock number column.* This column lists the National stock number for the associated part number and manufacturer identified in the part number and FSCM columns to the left.

(4) *Fig. column.* This column lists the number of the figure where the item is identified/located in sections II and III.

(5) *Item column.* The item number is that number assigned to the item as it appears in the figure referenced in the adjacent figure number column.

5. Special Information

a. *Associated Publications.* The publications listed below pertain to the MX—10387/T and its components:

TM 11—7045—200—12, Eraser, Magnetic MX—10387/T
TM 11—7045—200—20P, Eraser, Magnetic MX—10387/T
TM 11—7045—200—34, Eraser, Magnetic MX—10387/T

b. National Stock Numbers. National stock numbers (NSN's) that are missing from P source coded items have been applied for and will be added to this TM by future change/revision when they are entered in the Army Master Data File (AMDF). Until the NSN's are established and published, submit exception requisitions to: Commander, US Army Communications—Electronics Command and Fort Monmouth, ATTN: AMSEL—MM, Fort Monmouth, NJ 07703—5006 for the part required to support your equipment.

6. How to Locate Repair Parts

a. When National stock number or part number is not known.

(1) *First.* Using the table of contents, determine the assembly group or subassembly group to which the item belongs. This is necessary since figures are prepared for assembly groups and subassembly groups, and listings are divided into the same groups.

(2) *Second.* Find the figure covering the assembly group or subassembly group to which the item belongs.

(3) *Third.* Identify the item on the figure and note the item number.

(4) *Fourth.* Refer to the Repair Parts List for the figure to find the part number for the item number noted on the figure.

(5) *Fifth.* Refer to the Part Number Index to find the NSN, if assigned.

b. When National stock number or part number is known.

(1) *First.* Using the index of National stock numbers and part numbers, find the pertinent National stock number or part number. The NSN index is in National item identification number (NIIN) sequence (para 4a(1)). The part numbers in the part number index are listed in ascending alphameric sequence (para 4*b*). Both indexes cross-reference you to the illustration figure and item number of the item you are looking for.

(2) *Second.* After finding the figure and item number, verify that the item is the one you're looking for, then locate the item number in the repair parts list for the figure.

7. Abbreviations

Not applicable.

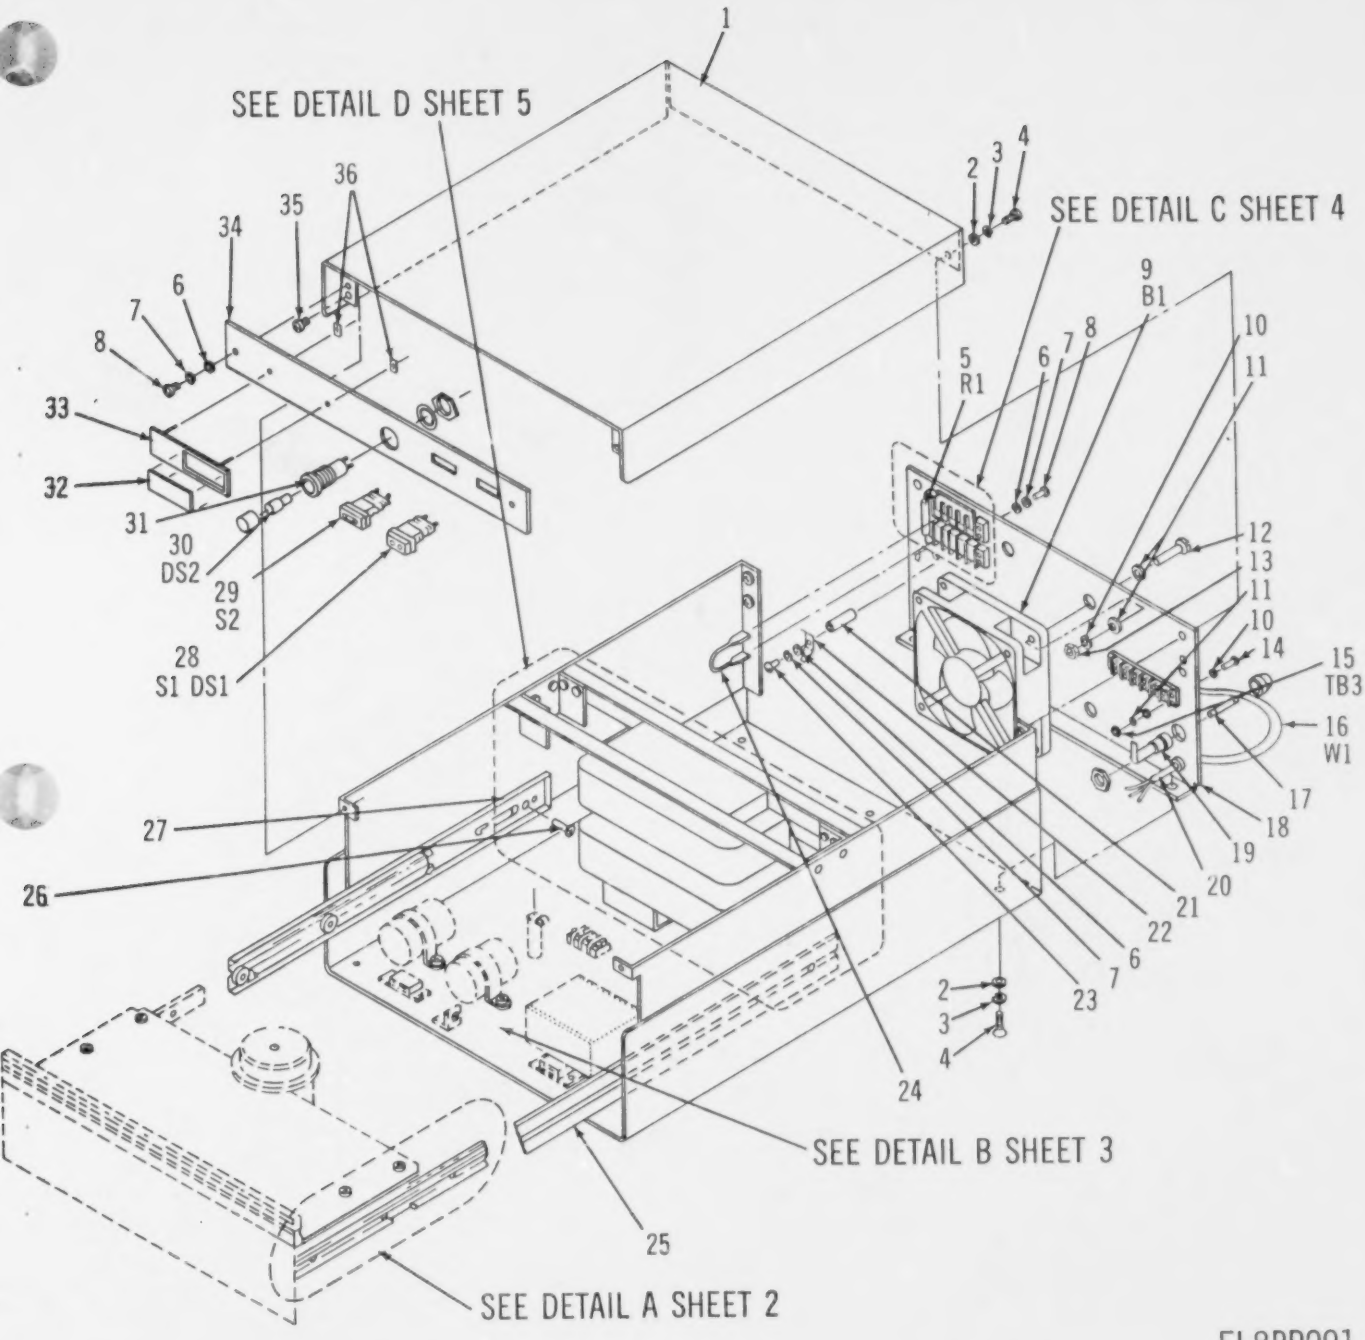

Figure 1. Eraser, Magnetic MX-10387/T
(Sheet 1 of 5)

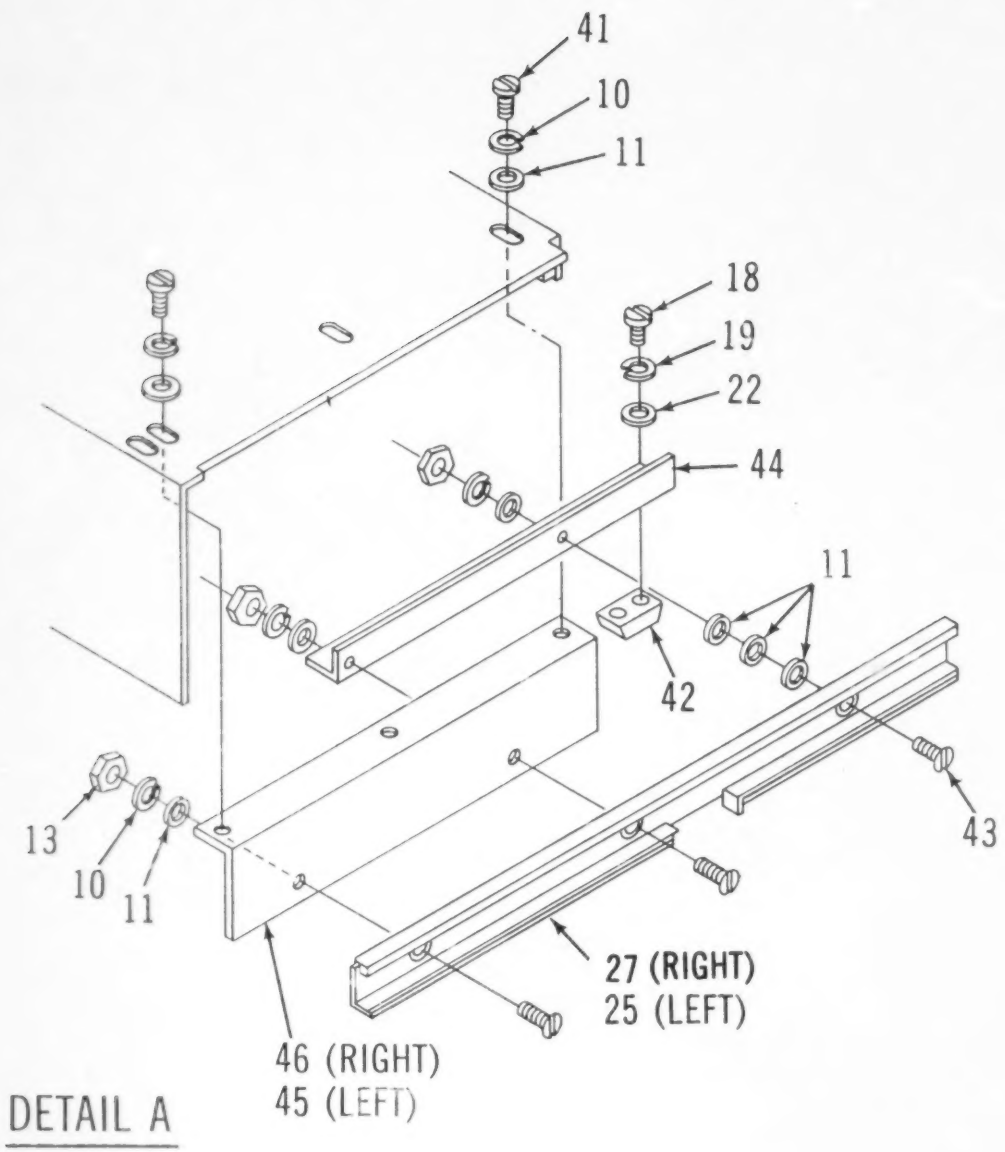

Figure 1. Eraser, Magnetic MX-10387/T
(Sheet 2 of 5)

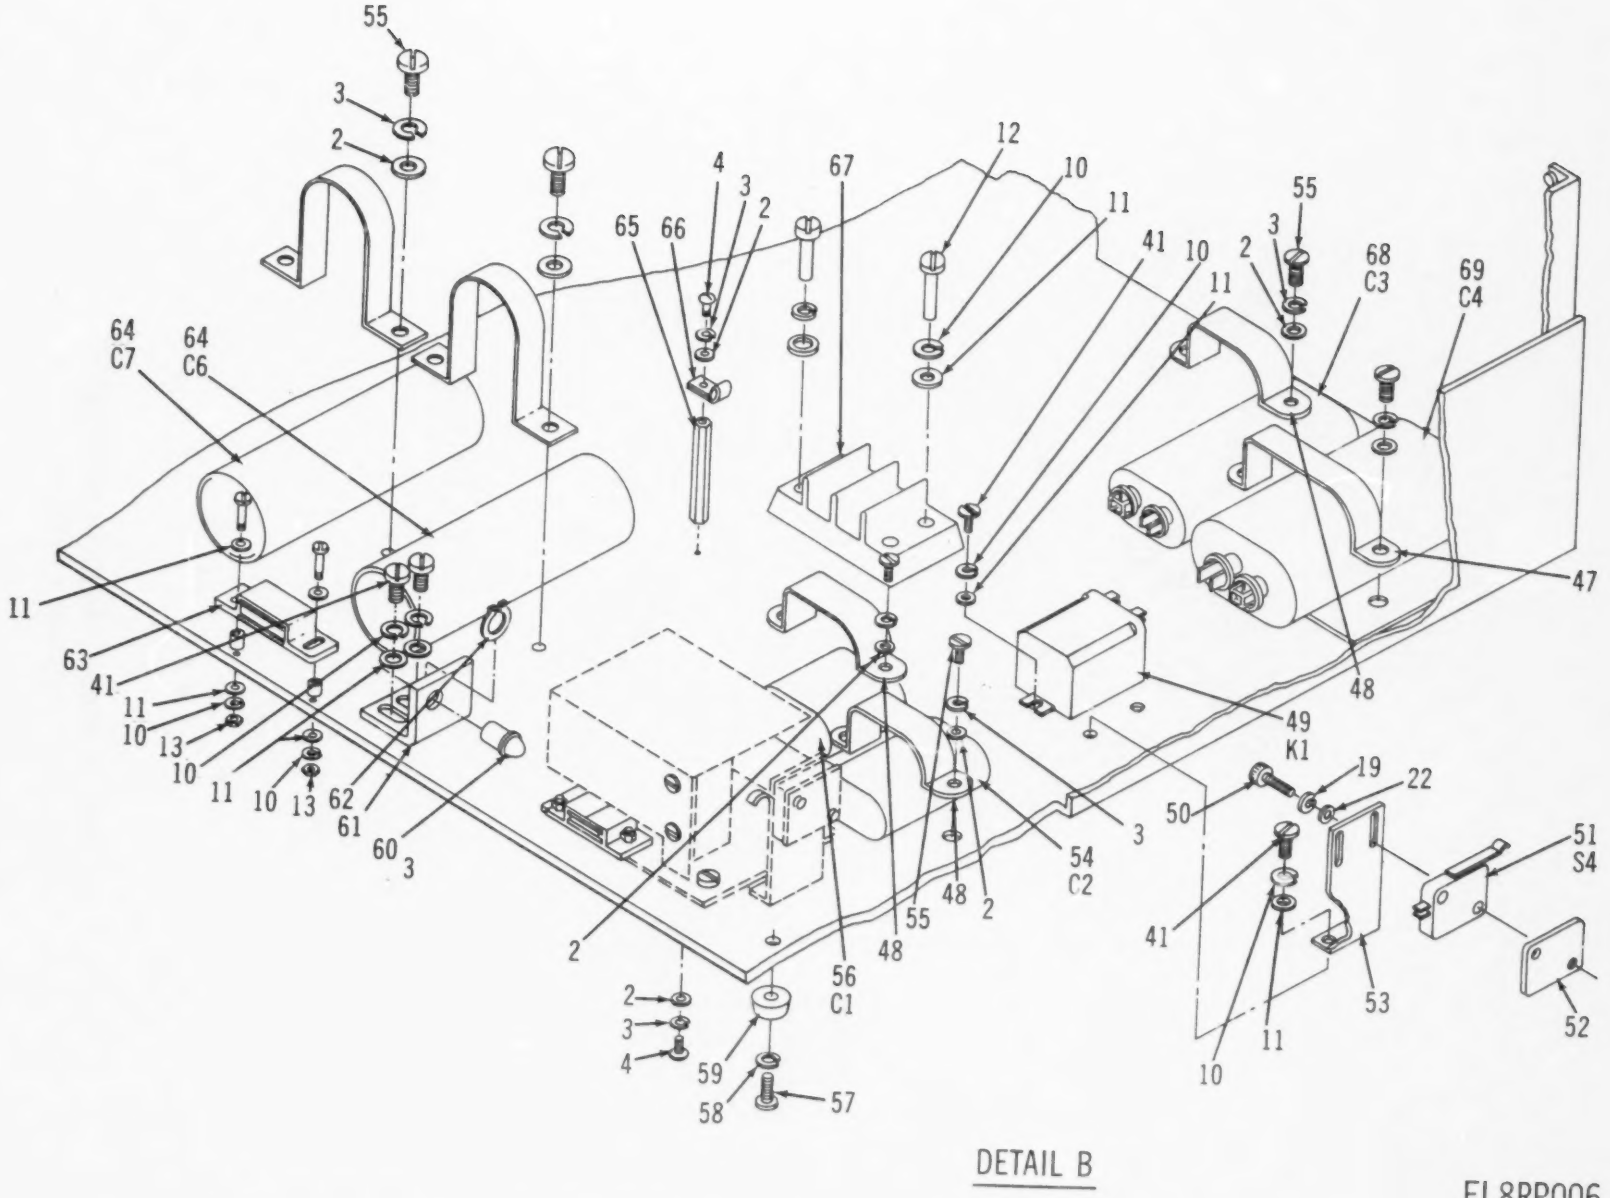

DETAIL B

EL8RP006

Figure 1. Eraser, Magnetic MX-10387/T
(Sheet 3 of 5)

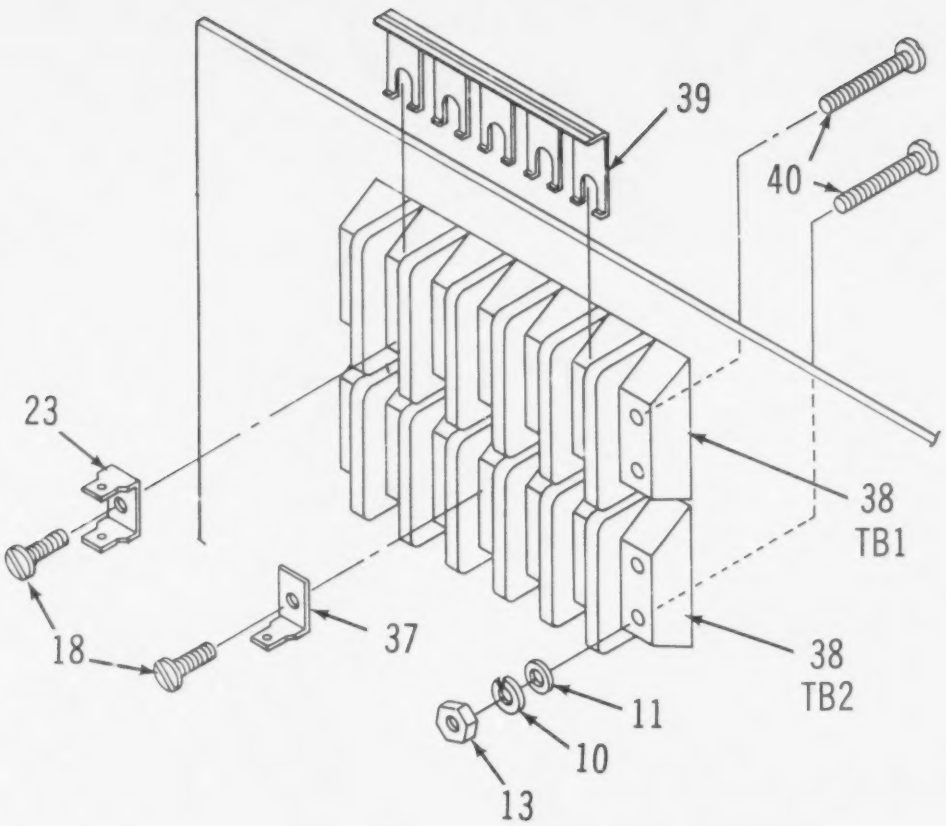

Figure 1. Eraser, Magnetic MX-10387/T
(Sheet 4 of 5)

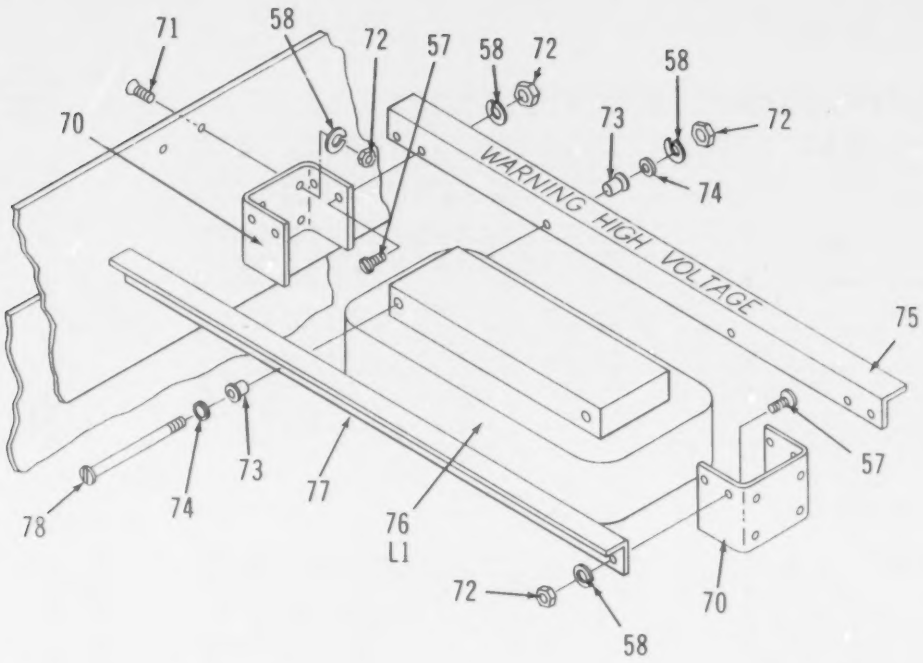

DETAIL D

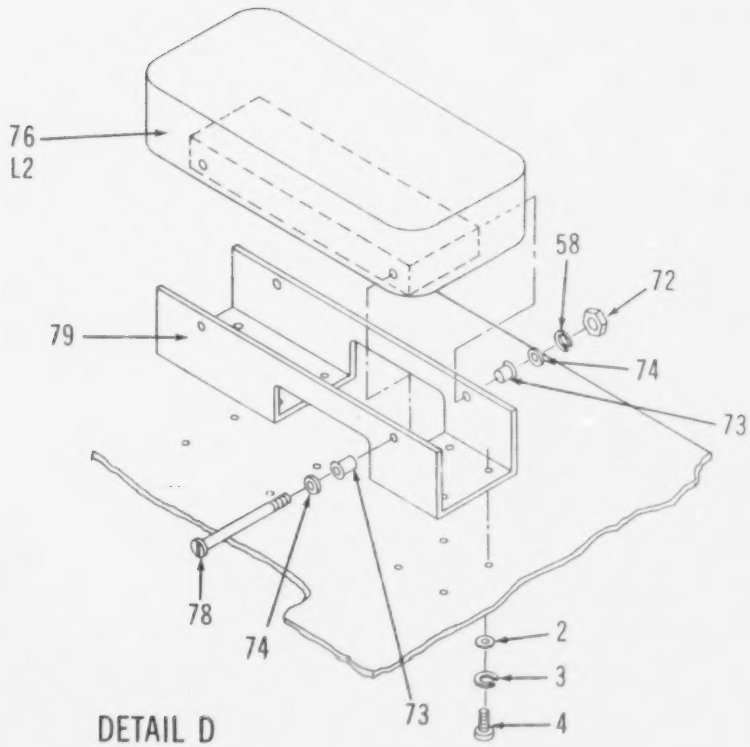

DETAIL D

EL8RP007

Figure 1. Eraser, Magnetic MX-10387/T
(Sheet 5 of 5)

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES(UOC)	(6) QTY
				GROUP 00 ERASER,MAGNETIC MX-10387/T	
				FIG 1	
1	XBFZZ	12049	504-353D-1	TOP, CABINET	1
2	PAFZZ	88044	AN960-8	WASHER,FLAT	8
3	PAFZZ	96906	MS35338-42	WASHER,LOCK	7
4	PAFZZ	96906	MS-35206-245	SCREW,MACHINE	21
5	PAFZZ	91637	RS10-104F	RESISTOR,FIXED,WIRE	1
6	XBFZZ	96906	MS27183-4	WASHER,FLAT	17
7	PAFZZ	96906	MS35338-40	WASHER,LOCK	10
8	XBFZZ	96906	MS35206-214	SCREW,MACHINE	2
9	PAFZZ	12049	181-02-001	FAN,TUBEAXIAL	1
10	PAFZZ	96906	MS35338-41	WASHER,LOCK	3
11	PAFZZ	88044	AN960-6	WASHER,FLAT	3
12	XBFZZ	96906	MS35206-231	SCREW,MACHINE	6
13	PAFZZ	96906	MS35649-262	NUT,PLAIN,HEXAGON	12
14	XBFZZ	96906	MS35206-232	SCREW,MACHINE	2
15	XBFZZ	81349	38TB8	TERMINAL BOARD	1
16	XBFZZ	70903	8601	CABLE,SPECIAL PURPO	1
17	PAOZZ	71400	MDA8	FUSE,CARTRIDGE	1
18	XBFZZ	12049	504-356D-1	PANELD REAR	1
19	XBFZZ	79915	342-022	FUSEHOLDER	1
20	PAFZZ	28520	SR-6P3-4	BUSHING,STRAIN RELI	1
21	XBFZZ	15849	853	STANDOFF, INSUL	1
22	PAFZZ	75382	KT30	TERMINAL,QUICK DISC	2
23	XBFZZ	96906	MS35206-212	SCREW,MACHINE	2
24	XBFZZ	12049	504-366B-1	JUMPER LEAD, EL	5
25	XBFZZ	12049	504-358B-2	SLIDE, LEFT	1
26	PAFZZ	96906	MS35190-248	SCREW,MACHINE	6
27	XBFZZ	12049	504-358B-1	SLIDE, RIGHT	1
28	PAFZZ	12049	051-02-033	SWITCH, ILLUM	1
29	PAFZZ	27244	1820-123-300-414	SWITCH, MOMENTARY	1
30	PAOZZ	12049	046-01-033	LAMP,INCANDESCENT	1
31	XBFZZ	72691	135-410-1435301	LAMPHOLDER	1
32	XBFZZ	12049	504-357B-1	NAMEPLATE	1
33	XBFZZ	12049	215-01-003	HOLDER, NAMEPLATE	1
34	XBFZZ	12049	504-350C-1	PANEL, SWITCH	1
35	XBFZZ	96906	MS35190-253	SCREW,MACHINE	2
36	XBFZZ	78553	C12003-017B	STUD, RECEIVER	2
37	XBFZZ	75382	KT36	TERMINAL,QUICK DISC	5
38	XBFZZ	81349	38TB5	TERMINAL BOARD	2
39	XBFZZ	75382	601RJS-5	JUMPER STRIP	1
40	XBFZZ	96906	MS35190-240	SCREW,MACHINE	4
41	XBFZZ	96906	MS35206-25	SCREW,MACHINE	18
42	PAFZZ	91929	JS-221	ADAPTER,SWITCH ACTU	1
43	XBFZZ	96906	MS24693S29	SCREW,MACHINE	5
44	XBFZZ	12049	504-334B-1	BRACKET, SWITCH	1
45	XBFZZ	12049	504-337B-1	BRACKET, ANGLE	1
46	XBFZZ	12049	504-337B-2	BRACKET, ANGLE	1
47	XBFZZ	14655	30393-9	STRAP,RETAINING	1

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES(UOC)	(6) QTY
48	XBFZZ	01002	279A7235P23	CLAMP, CAPACITOR	2
49	PAFZZ	12049	052-05-013	RELAY,ELECTROMAGNET	1
50	XBFZZ	96906	MS16997-13	SCREW,CAP,SOCKET HE	4
51	XDFZZ	80207	2TMT14-4	SWITCH,SENSITIVE	2
52	X3FZZ	12049	504-345B-1	NUT PLATE, SW	2
53	XBFZZ	12049	504-340B-1	BRACKET, SW MTG	2
54	PAFZZ	01002	21L3404	CAPACITOR,FIXED,PAP	1
55	PAFZZ	96906	MS35206-242	SCREW,MACHINE	12
56	PAFZZ	01002	021L3402	CAPACITOR	1
57	PAFZZ	96906	MS35207-263	SCREW,MACHINE	8
58	PAFZZ	96906	MS35338-43	WASHER,LOCK	16
59	XBFZZ	76358	2197	FOOT, RUBBER	4
60	XBFZZ	01930	T3674	CATCH, BULLET	1
61	XBFZZ	12049	504-344B-1	BRACKET, CATCH	1
62	XDFZZ	96906	MS90707-1037	RING,RETAINING	1
63	XDFZZ	01930	9793	CATCH,MAGNETIC	1
64	PAFZZ	01002	B1L-430	CAPACITOR,FIXED	2
65	PAFZZ	06540	8596-A-0832	HOLDER,CONTACT	1
66	PAFZZ	83330	833	CLAMP,LOOP	1
67	XDFZZ	75382	671-2	TERMINAL BOARD	1
68	PAFZZ	12049	042-05-048	CAPACITOR	1
69	PAFZZ	12049	042-05-047	CAPACITOR	1
70	XBFZZ	12049	504-355B-1	U BRACKET, COIL	2
71	XBFZZ	96906	MS35191-272	SCREW,MACHINE	4
72	PAFZZ	96906	MS35650-302	NUT,PLAIN,HEXAGON	16
73	XBFZZ	83330	2537	SPACER,SLEEVE	8
74	PAFZZ	88044	AN960-10	WASHER,FLAT	8
75	XBFZZ	12049	504-339C-1	ANGLE, COIL MTG	1
76	PAFZZ	12049	504-360D-1	COIL	2
77	XBFZZ	12049	504-339C-2	ANGLE, COIL MTG	1
78	XBFZZ	96906	MS35226-75	SCREW, MACHINE	4
79	XBFZZ	12049	504-338C-1	BRACKET, COIL	1

END OF FIGURE

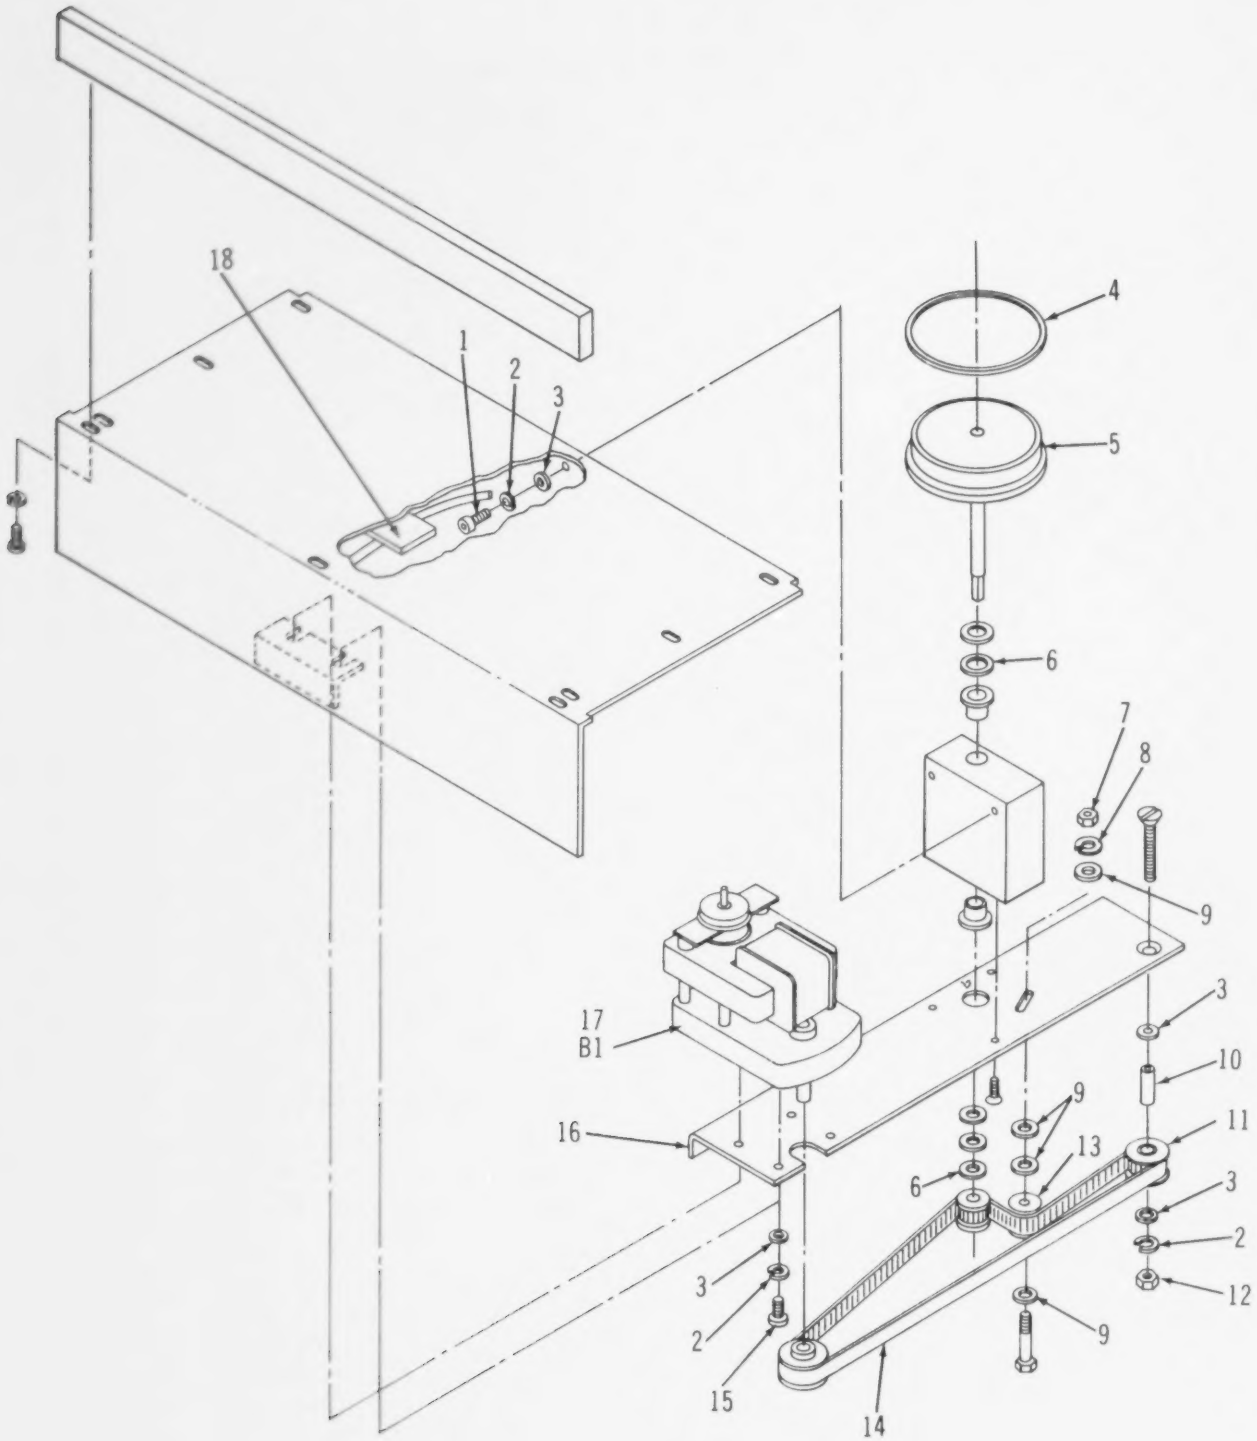

EL8RP002

Figure 2. Reel Carriage Assembly

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES(UOC)	(6) QTY
				GROUP 01 REEL CARRIAGE ASSEMBLY	
				FIG 2	
1	PAFZZ	96906	MS16997-32	SCREW,CAP,SOCKET HE.....	2
2	PAFZZ	96906	MS35338-42	WASHER,LOCK.....	35
3	PAFZZ	88044	AN960-8	WASHER,FLAT.....	43
4	XBOZZ	12049	504-370B-1	RING, FRICTION.....	1
5	XBFZZ	12049	504-352B-1	SHAFT, REEL.....	1
6	PAFZZ	88044	AN960-616	WASHER,FLAT.....	3
7	PAFZZ	96906	MS35649-2252	NUT,PLAIN,HEXAGON.....	1
8	PAFZZ	96906	MS35338-44	WASHER,LOCK.....	1
9	PAFZZ	88044	AN960-416	WASHER,FLAT.....	4
10	XBFZZ	12049	504-332B-1	SHAFT, IDLER.....	1
11	XBFZZ	12049	504-333B-2	PULLEY, IDLER.....	1
12	PAFZZ	96906	MS35649-282	NUT,PLAIN,HEXAGON.....	1
13	XDFZZ	75277	D2255	BEARING,BALL,ANNULA.....	1
14	XBOZZ	89616	260XL-037	BELT,POSITIVE DRIVE.....	1
15	XBFZZ	96906	MS35206-248	SCREW,MACHINE.....	4
16	XBFZZ	12049	504-349C-1	PLATE, MOTOR.....	1
17	PAFZZ	12049	062-07-003	MOTOR,ALTERNATING C.....	1
18	PAFZZ	49956	152272-12	BRACKET,CABLE.....	1
				END OF FIGURE	

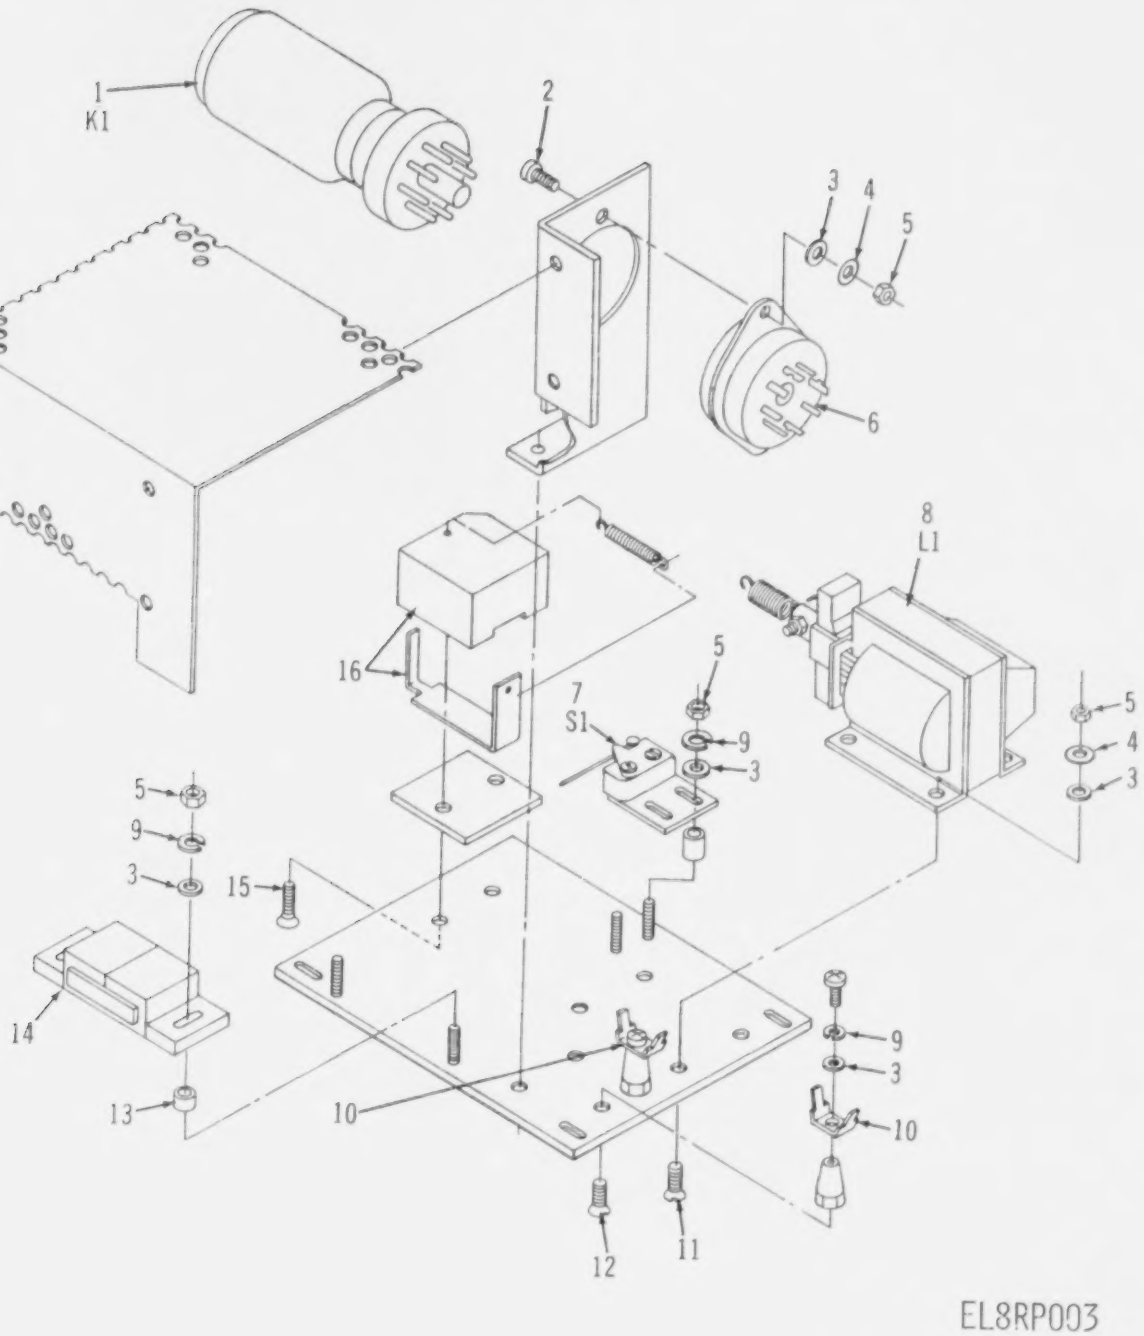

Figure 3. Carriage Control Assembly

(1) ITEM NO	(2) SMR CODE	(3) FSCM	(4) PART NUMBER	(5) DESCRIPTION AND USABLE ON CODES(UOC)	(6) QTY
				GROUP 02 CARRIAGE CONTROL ASSEMBLY	
				FIG 3	
1	PAFZZ	12049	052-10-004	RELAY,ELECTROMAGNET	1
2	XBFZZ	96906	MS35206-214	SCREW,MACHINE	5
3	XBFZZ	96906	MS27183-4	WASHER,FLAT	10
4	PAFZZ	88044	AN936-B4	WASHER,LOCK	8
5	PAFZZ	96906	MS35649-242	NUT,PLAIN,HEXAGON	13
6	PAFZZ	96906	MS3476L14-15S	CONNECTOR,PLUG,ELEC	1
7	XDFZZ	91929	11SM1T	SWITCH,SENSITIVE	1
8	PAFZZ	12049	063-02-005	SOLENOID,ELECTRICAL	1
9	PAFZZ	96906	MS35338-40	WASHER,LOCK	9
10	PAFZZ	75382	KT30	TERMINAL,QUICK DISC	6
11	PAFZZ	96906	MS35190-221	SCREW,MACHINE	2
12	PAFZZ	96906	MS35190-223	SCREW,MACHINE	6
13	XBFZZ	83330	2100	SPACER,SLEEVE	2
14	XDFZZ	01930	9793	CATCH,MAGNETIC	1
15	PAFZZ	96906	MS35190-235	SCREW,MACHINE	2
16	PAFZZ	12049	504-365B-1	ACTUATOR,ELECTRO ME	1
				END OF FIGURE	

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

NATIONAL STOCK NUMBER INDEX

STOCK NUMBER	FIG.	ITEM
5310-00-045-3296	1	58
5310-00-045-3299	1	3
	2	2
5310-00-045-4007	1	10
5305-00-059-4550	3	15
5930-00-065-6160	1	42
5975-00-068-6767	1	20
4140-00-113-0989	1	9
5310-00-141-1795	2	9
5310-00-167-0816	1	11
5310-00-167-0818	1	74
5310-00-167-0821	2	6
5340-00-291-5294	1	66
5920-00-296-0448	1	17
5340-00-514-4137	2	18
5310-00-515-8058	1	2
	2	3
5310-00-543-2410	1	7
	3	9
5310-00-582-5965	2	8
5310-00-616-3554	3	4
5905-00-844-3206	1	5
5305-00-889-3002	1	55
5310-00-934-9739	3	5
5310-00-934-9747	1	13
5310-00-934-9751	1	72
5310-00-934-9757	2	12
5305-00-957-6636	3	12
5305-00-958-5483	3	11
5305-00-959-2673	1	26
5305-00-978-9370	2	1
5305-00-984-6193	1	4
5305-00-989-7434	1	57
5310-00-997-1888	2	7
5999-01-092-9645	1	65
5910-01-104-7317	1	54
6105-01-137-1877	2	17
6240-01-137-9133	1	30
3010-01-138-1796	3	16
5945-01-139-5179	3	1
5910-01-140-2733	1	64
5910-01-140-2734	1	56
5950-01-164-4362	1	76

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
88044	AN936-B4	5310-00-616-3554	3	4
88044	AN960-10	5310-00-167-0818	1	74
88044	AN960-416	5310-00-141-1795	2	9
88044	AN960-6	5310-00-167-0816	1	11
88044	AN960-616	5310-00-167-0821	2	6
88044	AN960-8	5310-00-515-8058	1	2
			2	3
01002	B1L-430	5910-01-140-2733	1	64
78553	C12003-017B		1	36
75277	D2255		2	13
91929	JS-221	5930-00-065-6160	1	42
75382	KT30		1	22
			3	10
75382	KT36		1	37
71400	MDA8	5920-00-296-0448	1	17
96906	MS-35206-245	5305-00-984-6193	1	4
96906	MS16997-13		1	50
96906	MS16997-32	5305-00-978-9370	2	1
96906	MS24693S29		1	43
96906	MS27183-4		1	6
			3	3
96906	MS3476L14-15S		3	6
96906	MS35190-221	5305-00-958-5483	3	11
96906	MS35190-223	5305-00-957-6636	3	12
96906	MS35190-235	5305-00-059-4550	3	15
96906	MS35190-240		1	40
96906	MS35190-248	5305-00-959-2673	1	26
96906	MS35190-253		1	35
96906	MS35191-272		1	71
96906	MS35206-212		1	23
96906	MS35206-214		1	8
			3	2
96906	MS35206-231		1	12
96906	MS35206-232		1	14
96906	MS35206-242	5305-00-889-3002	1	55
96906	MS35206-248		2	15
96906	MS35206-25		1	41
96906	MS35207-263	5305-00-989-7434	1	57
96906	MS35226-75		1	78
96906	MS35338-40	5310-00-543-2410	1	7
			3	9
96906	MS35338-41	5310-00-045-4007	1	10
96906	MS35338-42	5310-00-045-3299	1	3
			2	2
96906	MS35338-43	5310-00-045-3296	1	58
96906	MS35338-44	5310-00-582-5965	2	8
96906	MS35649-2252	5310-00-997-1888	2	7
96906	MS35649-242	5310-00-934-9739	3	5
96906	MS35649-262	5310-00-934-9747	1	13
96906	MS35649-282	5310-00-934-9757	2	12
96906	MS35650-302	5310-00-934-9751	1	72

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
96906	MS90707-1037		1	62
91637	RS10-104F	5905-00-844-3206	1	5
28520	SR-6P3-4	5975-00-068-6767	1	20
01930	T3674		1	60
01002	021L3402	5910-01-140-2734	1	56
12049	042-05-047		1	69
12049	042-05-048		1	68
12049	046-01-033	6240-01-137-9133	1	30
12049	051-02-033		1	28
12049	052-05-013		1	49
12049	052-10-004	5945-01-139-5179	3	1
12049	062-07-003	6105-01-137-1877	2	17
12049	063-02-005		3	8
91929	11SM1T		3	7
72691	135-410-1435301		1	31
49956	152272-12	5340-00-514-4137	2	18
12049	181-02-001	4140-00-113-0989	1	9
27244	1820-123-300-414		1	29
80207	2TMT14-4		1	51
01002	21L3404	5910-01-104-7317	1	54
83330	2100		3	13
12049	215-01-003		1	33
76358	2197		1	59
83330	2537		1	73
89616	260XL-037		2	14
01002	279A7235P23		1	48
14655	30393-9		1	47
79915	342-022		1	19
81349	38TB5		1	38
81349	38TB8		1	15
12049	504-332B-1		2	10
12049	504-333B-2		2	11
12049	504-334B-1		1	44
12049	504-337B-1		1	45
12049	504-337B-2		1	46
12049	504-338C-1		1	79
12049	504-339C-1		1	75
12049	504-339C-2		1	77
12049	504-340B-1		1	53
12049	504-344B-1		1	61
12049	504-345B-1		1	52
12049	504-349C-1		2	16
12049	504-350C-1		1	34
12049	504-352B-1		2	5
12049	504-353D-1		1	1
12049	504-355B-1		1	70
12049	504-356D-1		1	18
12049	504-357B-1		1	32
12049	504-358B-1		1	27
12049	504-358B-2		1	25
12049	504-360D-1	5950-01-164-4362	1	76

NATIONAL STOCK NUMBER AND PART NUMBER INDEX

PART NUMBER INDEX

FSCM	PART NUMBER	STOCK NUMBER	FIG.	ITEM
12049	504-365B-1	3010-01-138-1796	3	16
12049	504-366B-1		1	24
12049	504-370B-1		2	4
75382	601RJS-5		1	39
75382	671-2		1	67
83330	833	5340-00-291-5294	1	66
15849	853		1	21
06540	8596-A-0832	5999-01-092-9645	1	65
70903	8601		1	16
01930	9793		1	63
			3	14

TEAR ALONG PERFORATED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

SOMETHING WRONG WITH THIS PUBLICATION?

FROM (PRINT YOUR UNIT'S COMPLETE ADDRESS)
Commander
Stateside Army Depot
ATTN: AMSTA-US
Stateside, N.J. 07703-5007

DATE SENT
10 July 1975

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 11-5840-340-20P	23 Jan 78	Radar Set AN/PRC-76

BE EXACT PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO
33			
44		19	
45			

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

For item 2, change the NSN to read: 5835-00-134-9186.
Reason: Accuracy.

Identify the cover on the junction box (item no. 5).
Reason: It is a separate item and is not called out on figure 19.

Add the cover of the junction box as an item in the listing for figure 19.
Reason: Same as above

SAMPLE

PRINTED NAME, GRADE OR TITLE AND TELEPHONE NUMBER
SSG I. M. DeSpirit of 999-1776

SIGN HERE
I. M. DeSpirit

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE.

P.S.--IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS

REVERSE OF DA FORM 2028-2

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

SAMPLE

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, New Jersey 07703-5007

TEAR ALONG PERFORATED LINE

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL.

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS

DATE SENT

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 11-7045-200-34P	12 Sep 85	Eraser, Magnetic MX-10387/T

BE EXACT PIN-POINT WHERE IT IS

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE

P.S. IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPE OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG PERFORATED LINE

REVERSE OF DA FORM 2028-2

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

TEAR ALONG PERFORATED LINE

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, New Jersey 07703-5007

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL.

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS

DATE SENT

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 11-7045-200-34P	12 Sep 85	Eraser, Magnetic MX-10387/T

BE EXACT PIN-POINT WHERE IT IS

PAGE NO.	PARA-GRAPH	FIGURE NO.	TABLE NO.

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE

P.S. IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPE OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG PERFORATION

REVERSE OF DA FORM 2028-2

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

_____

_____

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314

U.S. MAIL

TEAR ALONG PERFORATED LINE

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, New Jersey 07703-5007

RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

THEN...JOT DOWN THE DOPE ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT, FOLD IT AND DROP IT IN THE MAIL.

SOMETHING WRONG WITH THIS PUBLICATION?

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS

DATE SENT

PUBLICATION NUMBER	PUBLICATION DATE	PUBLICATION TITLE
TM 11-7045-200-34P	12 Sep 85	Eraser, Magnetic MX-10387/T

BE EXACT PIN-POINT WHERE IT IS

PAGE NO	PARA-GRAPH	FIGURE NO	TABLE NO

IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:

PRINTED NAME GRADE OR TITLE AND TELEPHONE NUMBER

SIGN HERE

DA FORM 1 JUL 79 2028-2

PREVIOUS EDITIONS ARE OBSOLETE

P.S. IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPE OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

TEAR ALONG PERFORATION

REVERSE OF DA FORM 2028-2

TEAR ALONG PERFORATED LINE

FILL IN YOUR UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD 314

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-ME-MP
Fort Monmouth, New Jersey 07703-5007

By Order of the Secretary of the Army:

JOHN A. WICKHAM JR.
General, United States Army
Chief of Staff

Official:

DONALD J. DELANDRO
Brigadier General, United States Army
The Adjutant General

DISTRIBUTION:
To be distributed in accordance with DA Form 12-36 literature requirements for MX-10387/T.

* U.S. Government Printing Office: 1985—505-044/20157